

# COMMERCIAL/INDUSTRIAL

- **Final color selection should be made from actual color chips.**
- For the most current information available, visit our website at [www.mbc.com](http://www.mbc.com).
- See the product selection chart for gauge and finish availability.
- All products are available in smooth or embossed finish.
- Trim is available in all colors.
- Review the sample warranty for complete performance attributes and terms and conditions.

## SIGNATURE® 200

STANDARD COLORS  
26- AND 24-GAUGE MATERIAL

### Siliconized Polyester

Polar White is a Straight Polyester.

\* Also available in 29-gauge

\*\* Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.



HAWAIIAN BLUE\*\* ★  
SR .31 SRI 31



CRIMSON RED\*\* ★  
SR .32 SRI 33



FERN GREEN\*\* ★  
SR .29 SRI 29



BURNISHED SLATE\*\* ★  
SR .34 SRI 36



ASH GRAY ★  
SR .45 SRI 50



SADDLE TAN ★  
SR .47 SRI 53



DESERT SAND ★  
SR .42 SRI 47



KOKO BROWN ★  
SR .35 SRI 37



CHARCOAL GRAY\*\* ★  
SR .38 SRI 41




COBALT BLUE\*\* ★  
SR .26 SRI 24




RUSTIC RED ★  
SR .37 SRI 39



LIGHT STONE ★  
SR .56 SRI 66



POLAR WHITE\* ★  
SR .58 SRI 68



SOLAR WHITE\*\* ★  
SR .71 SRI 86

## SIGNATURE® 300

STANDARD COLORS  
26-GAUGE MATERIAL  
PBR, PBU, AVP, PBC, PBD  
PANELS ONLY


\* Also available in 24-gauge

\*\* Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.

† Minimum quantities and/or extended lead times required for all gauges. Please inquire.




MEDIUM BRONZE\* ★  
SR .33 SRI 34



SNOW WHITE\* ★  
SR .65 SRI 78



SLATE GRAY\*\* ★  
SR .37 SRI 39



ALMOND\* ★  
SR .63 SRI 75



CLASSIC GREEN\*\* ★  
SR .27 SRI 26




BROWNSTONE\* ★  
SR .47 SRI 53



BRITE RED † ★  
SR .49 SRI 55



HARBOR BLUE\*\* ★  
SR .28 SRI 27



BONE WHITE\*\* ★  
SR .70 SRI 85

COLOR CHART



\* ENERGY STAR® Qualified



## SOLAR REFLECTIVITY (SR)

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. ENERGY STAR® requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes three years to complete, so not all products that meet the initial requirements are qualified. For more information, please visit [www.energystar.gov](http://www.energystar.gov).




## SOLAR REFLECTANCE INDEX (SRI)

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please visit [www.usgbc.org](http://www.usgbc.org).


| PANEL PROFILE   | Panel | 29 GAUGE       |         |         | 26 GAUGE       |         |         | 24 GAUGE       |         |         | 22 GAUGE       |         |         |
|-----------------|-------|----------------|---------|---------|----------------|---------|---------|----------------|---------|---------|----------------|---------|---------|
|                 |       | Galvalume Plus | Sig 200 | Sig 300 | Galvalume Plus | Sig 200 | Sig 300 | Galvalume Plus | Sig 200 | Sig 300 | Galvalume Plus | Sig 200 | Sig 300 |
| <br>"PBR" PANEL | PBR   | ●              | ■       | ●       | ●              | ●       | ●       | ■              | ■       | ●       | ■              | ■       |         |
| <br>"PBU" PANEL | PBU   | ●              | ■       | ●       | ●              | ●       | ●       | ■              | ■       | ●       | ■              | ■       |         |
| <br>"PBC" PANEL | PBC   | ●              | ■       | ●       | ●              | ●       | ●       | ■              | ■       | ●       | ■              | ■       |         |
| <br>"PBD" PANEL | PBD   | ●              | ■       | ●       | ●              | ●       | ●       | ■              | ■       | ●       | ■              | ■       |         |
| <br>7.2 PANEL   | 7.2   | ●              | ■       | ●       | ■              | ■       | ●       | ■              | ■       | ●       | ■              | ■       |         |
| <br>"AVP" PANEL | AVP   | ●              | ■       | ●       | ●              | ●       | ●       | ■              | ■       | ●       | ■              | ■       |         |

● Available in any quantity    ■ May require minimum quantity

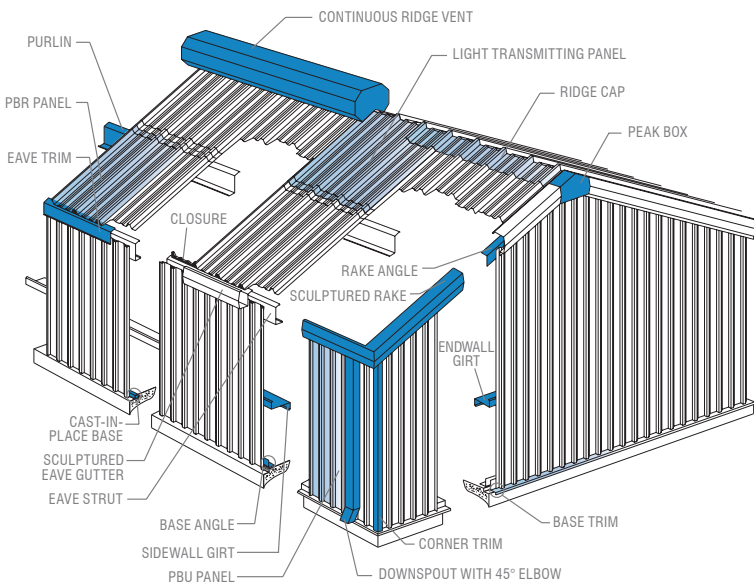

## AVAILABLE ACCESSORIES

- Hat and Channel Sections
- Light Transmitting Panels
- Vents
- Roof Jacks
- Fasteners
- Ridge Caps
- Closures
- Doors
- Windows
- Sealants
- Insulation
- Bracing
- Bolts
- Sliding Door Hardware

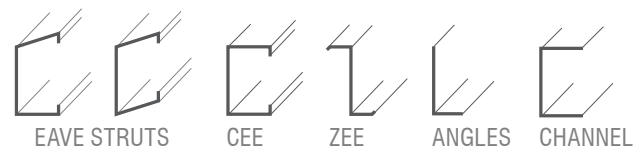

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at [MBCI.com](http://MBCI.com).

**FOR THE MOST CURRENT INFORMATION AVAILABLE, VISIT OUR WEBSITE AT [WWW.MBCI.COM](http://WWW.MBCI.COM)**

Houston, TX | 877.713.6224  
 Adel, GA | 888.446.6224  
 Atlanta, GA | 877.512.6224  
 Atwater, CA | 800.829.9324  
 Ennis, TX | 800.653.6224

Indianapolis, IN | 800.735.6224  
 Lubbock, TX | 800.758.6224  
 Memphis, TN | 800.206.6224  
 Oklahoma City, OK | 800.597.6224  
 Phoenix, AZ | 888.533.6224

Rome, NY | 800.559.6224  
 Salt Lake City, UT | 800.874.2404  
 San Antonio, TX | 800.598.6224

