


Miller Building Unit Mix			
Quantity	Style	Sq Ft	Total
17	10x10 - Exterior Rollup	100 SF	1700 SF
19	10x10 - Internal Rollup	100 SF	1900 SF
15	10x20 - Exterior Rollup	200 SF	3000 SF
2	5x10 - Exterior Rollup	50 SF	100 SF
10	5x10 - Internal Rollup	50 SF	500 SF
6	5x5 - Internal Rollup	25 SF	150 SF
2	5x5 - Internal Swing	25 SF	50 SF
			7400 SF

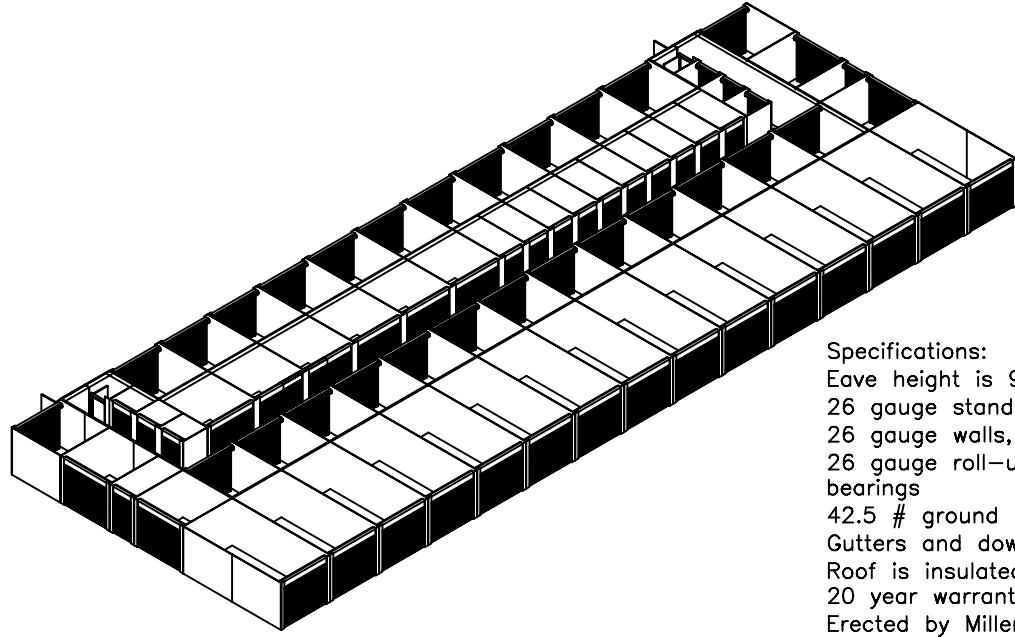

Specifications:
 Eave height is 9'-4"
 26 gauge standing seam roof (galvalume color) 1/4" : 12", peak
 26 gauge walls, siliconized polyester finish (15 colors)
 26 gauge roll-up doors (20 colors) tension control and ball bearings
 42.5 # ground snow load, 90 MPH wind load (exposure c)
 Gutters and downspouts (optional)
 Roof is insulated with 6" insulation
 20 year warranty on roof and walls
 Erected by Miller Buildings (5 yr. labor warranty)
 Walls have 4" insulation covered with galvalume partitions

Date	2006	Job Description	55' x 150' Mini Partially Climate Controlled 1" higher, 6" + 4" insulation Sheet Title Single Story Climate Controlled
Drawn By	KF		
Scale	1:1		
Order No.	Philadelphia, PA		
Sheet No.	1 of 1		
MILLER BUILDING SYSTEMS These drawings have been prepared for buildings incorporating methods & materials utilized by Miller Building Inc. Any unauthorized use of this drawings in whole or in part is prohibited and this notice shall serve to hold harmless Miller Building Inc.,		MILLER BUILDING SYSTEMS	
			Date Revision By