


Miller Building Unit Mix			
Quantity	Style	Sq Ft	Total
29	10x10 - Exterior Rollup	100 SF	2900 SF
36	10x10 - Internal Rollup	100 SF	3600 SF
39	10x15 - Internal Rollup	150 SF	5850 SF
6	10x5 - Internal Rollup	50 SF	300 SF
9	5x10 - Exterior Rollup	50 SF	450 SF
3	5x10 - Internal Rollup	50 SF	150 SF
9	5x15 - Internal Rollup	75 SF	675 SF
12	5x5 - Internal Rollup	25 SF	300 SF
			14225 SF

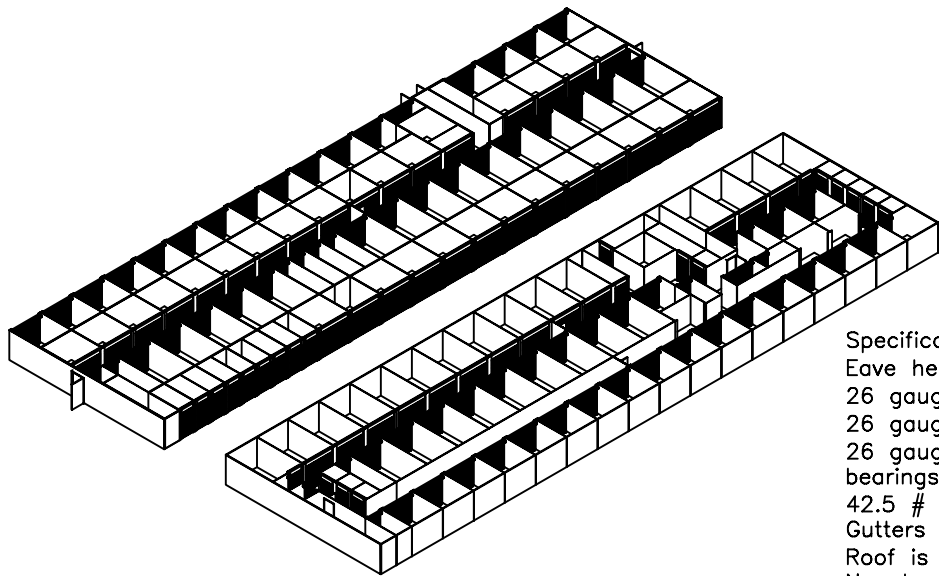

Specifications:

Eave height is 9'-4" per floor
 26 gauge standing seam roof (galvalume color) 1/4" : 12", peak
 26 gauge walls, siliconized polyester finish (15 colors)
 26 gauge roll-up doors (20 colors) tension control and ball bearings
 42.5 # ground snow load, 90 MPH wind load (exposure c)
 Gutters and downspouts
 Roof is insulated with 6" roof insulation; 4" wall insulation
 No elevation changes or steps
 20 year warranty on roof and walls
 Erected by Miller Buildings (5 yr. labor warranty)

Date	Revision	By

MILLER BUILDING SYSTEMS
 These drawings have been prepared for buildings incorporating methods & materials utilized by Miller Building Inc. Any unauthorized use of this drawings in whole or in part is prohibited and this notice shall serve to hold harmless Miller Building Inc.,



Job Description
50' x 180' Mini Building
 Sheet Title
Two Story Building

Date	2006
Drawn By	PL
Scale	1/4" : 1'
Order No.	Self Storage
Sheet No.	1 of 1